

Ink Types
[ELS-170 / 4C]
[ELH-100 / C+W]



UJV300DTF-75 use ELS-170 and ELH-100 ink, the next generation of Mimaki UV inks. The combination of ELH-100, a hard ink, and ELS-170, a flexible ink, has achieved industry-leading properties in both strength and flexibility among UV-DTF printers used in multiple applications.

Towards a More Environmentally Friendly Business Model



Mimaki's UV inks (ELS-170 and ELH-100) are GREENGUARD Gold certified, having passed the world's most stringent standards for chemical emissions. This certification ensures their suitability for use in sensitive environments such as schools and healthcare facilities, making them an ideal choice for environmentally responsible printing.



Mimaki Cloud Technology **PICT**

PICT allows users to monitor printer operation and ink usage remotely.

It supports better planning by providing real-time data on operational status and performance.

PICT helps with scheduled maintenance and preparing for ink refills, ensuring smooth and efficient production.

- Production control
- Preparing to refill ink
- Planning maintenance time etc...



Software to support operations from design creation to output (included as standard)

Supporting the beauty of prints and operability

Genuine RIP Software **Raster Link 7**

Easier Design Creation

Design software **Simple Create**

■ Specifications

Item	UJV300DTF-75
Print head	On-demand piezo head
Print resolution	300dpi, 600dpi, 900dpi, 1,200dpi
Ink	Type
	LED-UV ink
	ELS-170 + ELH-100
Color	ELS-170(C,M,Y,K) ELH-100(W,CL)
Capacity	1L (Bottle supply)
Ink circulation system	Available only for white ink
Max. print width	640mm(25.2in)
Max. media width	650mm(25.6in)
Media roll outer diameter	250mm(9.8in) or less
Media roll weight	45kg(99.2lb) or less
Safety standard	VCCI Class A / FCC Class A / ETL IEC 62368-1 / CE Marking(EMC, Low Voltage, Machinery Directive, RoHS)/ CB Report / REACH / ENERGY STAR / RCM / KC
Interface	USB2.0 / Ethernet1000 BASE-T
Power supply	Single phase AC100~120/200~240V±10%,50/60Hz±1Hz
Power consumption	AC100V : 1.44kW / AC200V : 1.92kW or less
Operational environment	Temperature
	20-30degC / 68-86 degF
Humidity	35-65% Rh(No condensing)
Dimensions(WxDxH)	2,090x930x1,475mm(82.3x36.6x58.1in)
Weight	180kg(396.8lb)

■ Ink

Item	Color	Item code	Remarks
ELS-170	Cyan	ELS170-C-BA	1L bottle
	Magenta	ELS170-M-BA	
	Yellow	ELS170-Y-BA	
ELH-100	Black	ELS170-K-BA	1L bottle
	White	ELH100-W-BA	
	Clear	ELH100-CL-BA	

■ Option

Item	Item code
Ionizer	OPT-J0465

⚠ Inks and substrates:

• As physical properties of ink (adhesion, weather resistance etc.) are different depending on media, please be sure to have a print test in advance.
• Depending on the application, primers, other surface treatment or surface protection such as lamination may be necessary.

⚠ Safety notice:

This product is equipped with UV irradiation equipment. Please pay attention to the following notes in order to use safely.
• Do not look directly into the UV light source nor place your hand, or expose your skin directly to the UV light source.
• Depending upon print mode, some VOC emissions from printed parts not yet cured and hardened may occur.
• In addition, please be sure to read and follow the instructions and guidelines of the manual carefully.

Mimaki

UV-DTF Printer **UJV300DTF-75**

UV-DTF:
Create

**High Value-Add
Printing Business**



Exclusively Distributed by: **BIG PIX GRAPHIC SYSTEMS INC.**
"It pays to be committed."

<p>MAKATI (HEAD OFFICE) 8837 Sampaloc St., San Antonio Village, Makati City 1203</p> <p>Contact No.: 890-2657-896-6698; 896-8488 +63 917 623 5986</p>	<p>PANGASINAN By-pass Road., Brgy. Sto. Domingo, Urdaneta City, Pangasinan</p> <p>Contact No.: +63 75 529 2367 +63 916 7255</p>	<p>CEBU 163 Sikatuna corner Jakosalem St., Brgy., Zapatera Cebu City</p> <p>Contact No.: +63 32 412 5661</p>	<p>CAGAYAN DE ORO Goking Building, San Pedro St., Gusa, Cagayan De Oro</p> <p>Contact No.: +63 88 885 0410 +63 917 713 6083</p>	<p>ZAMBOANGA 35A Villa Maria Drive, Estrada St. Tetuan, Zamboanga City</p> <p>Contact No.: +62 992 7156 +63 917 159 0677</p>	<p>DAVAO Dasi Comp., JP Laurel St. Bajada, Brgy. Buhangin Davao City</p> <p>Contact No.: +62 992 7156 +63 917 159 0677</p>
--	--	---	--	---	---

www.bigpixgraphics.com bigpixmarketing@gmail.com BigPixGraphicSystemsInc


UV-DTF, opens the new market

UV-DTF (UV Direct-to-Film) is a technology that allows UV printing on a special glued film and transferring it as is like a sticker.

Designs can be easily applied to uneven materials and items with special shapes, which have been difficult with conventional printing methods.

Since only the design printed on the film is transferred to the object, UV-DTF eliminates the need for weeding (removal of margins) manually as with sticker sheets, which also improves production efficiency.

This is Mimaki's new proposal to customers who want to print but have been unable to do so, and to open up a new market.

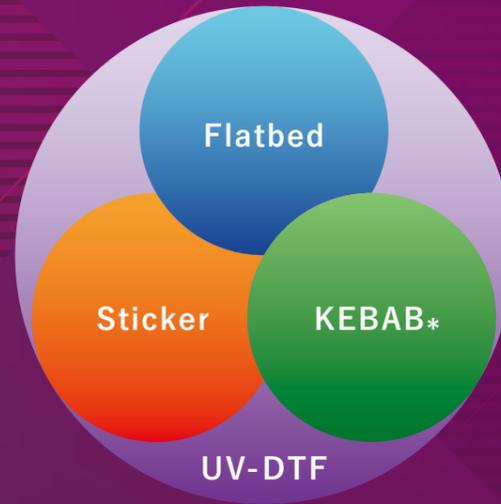

*Mimaki's product : 360° print system for cylindrical materials such as bottles and tumblers



Gaps that are unable to print on UV flatbed printers.



Cylinders of shapes that are unable to print on KEBAB.



Designs that leave original texture of objects, which was difficult with the sticker print.



Ceramic, PP and other materials that are difficult to print on with UV ink.



Capable of printing on undulations and hollows that flatbed printers are unable to print on.



Capable of printing small text, designs, and other detailed expressions without margins.



Stickers are limited in their use to designs with margins.

HOW TO UV-DTF

WORKFLOW

STEP 1



Designs are printed on special glued film, then application sheet is pasted on the film automatically.

Print White - Color - Clear as the order. Clear ink improves scratch resistance and makes application sheet removal easier.

STEP 2



Cut out the printed film and paste it on the item you want to paste.

STEP 3




Peel off the application sheet. Once removed, the transfer is completed and finished.


Mimaki's unique safe and stable film feeding system

New specialized pinch roller supports stable film feeding

Unique design pinch roller for the UV-DTF film realizes stable film feeding. This feeding technology supports handling of glued film surface.

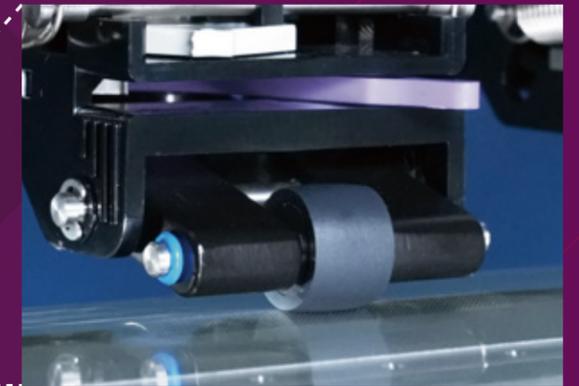

Nozzle Recovery



Mimaki's unique NCU (Nozzle Check Unit) and NRS (Nozzle Recovery System) allow printing to continue by re-mapping the defective nozzles with working nozzle when unrecoverable by nozzle cleaning. Printing speed remains the same when using the nozzle recovery system, facilitating business operations.

Media jam sensor



Equipped with a media jam sensor, the risk of print head failure is reduced even in situations where jams occur. This greatly reduces the risk of failure due to media jams on glue surfaces in the unlikely event of a media jam.



All of Mimaki's
Technology in One Place

UV-DTF Printer
UJV300DTF-75

Easy media set



Application sheets are set by simply pressing the lever.



Rear Take-Up System



Automatically takes-up the UV-DTF film liner paper at the back of the machine. The liner paper is rolled precisely at the printer's feeding speed, ensuring stable printing.